

ECO PANEL GEN3



PRODUCT DETAILS



- Size: 600x600mm, 1200x300mm, 1200x600mm
- Lumen maintenance: L80 54,000hrs @ +40°C
- LED: Colour Select 4000K/5000K/6500K, CRI80, 3SDCM
- Beam angle: Symmetrical, 90°
- Glare control: Improved optical design for UGR19 low glare applications
- Driver: Remote, Lumen Select, Non dimmable
- Flicker free: PstLM \leq 1, SVM \leq 0.4
- Rating: IP40 (from the front), IC-4/IC-F (for panel only), Class II
- Operating temperature: -10°C to +40°C
- Housing: Cold rolled steel
- Finishing: White RAL9003, Powder coated
- Diffuser/Lens: Polystyrene (PS), Micro prismatic
- Connection: 1.2m Flex & Plug
- Accessory: Complete with restraint/suspension hooks, Optional emergency kit, wire suspension kit, surface mounted frame, recessed frame
- Warranty: 5 year

MADE TO ORDER OPTIONS (LEAD TIME AND MOQ MAY APPLY)

Dimming, 600x300

APPLICATIONS

Recessed (grid ceiling), Internal
Offices, Schools, Foyers, Waiting-rooms, Shopping centres,
Commercial, Retail

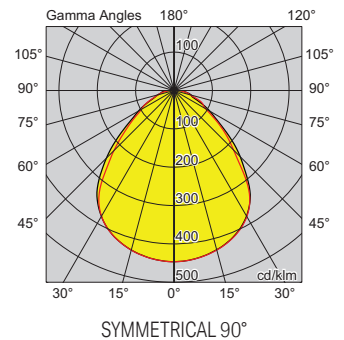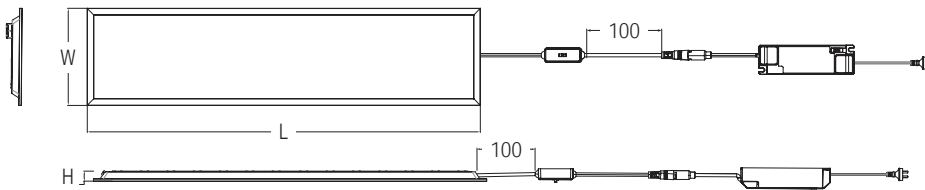

VERSION	L (MM)	W (MM)	H (MM)
ECOPL066CSLSEG3	594	594	32
ECOPL123CSLSEG3	1194	294	34
ECOPL126CSLSEG3	1194	594	37

CODE	DESCRIPTION	POWER [~]	LUMENS*	EFFICACY	WEIGHT
ECOPL126CSLSEG3	ECO PANEL 1200X600 LOW GLARE COLOUR & LUMEN SELECT CRI80 36W/46W NON DIM	47W 37W	5500LM 4500LM	117LM/W 122LM/W	4.03KG
ECOPL066CSLSEG3	ECO PANEL 600X600 LOW GLARE COLOUR & LUMEN SELECT CRI80 25W/34W NON DIM	34W 25W	3700LM 2900LM	109LM/W 116LM/W	1.77KG
ECOPL123CSLSEG3	ECO PANEL 1200X300 LOW GLARE COLOUR & LUMEN SELECT CRI80 25W/34W NON DIM	34W 25W	3700LM 2900LM	109LM/W 116LM/W	1.90KG

"POWER" is tested system powers from luminaire; "LUMENS" is delivered lumens from luminaire, including thermal, electrical and optic losses; ^Figures are interpolated / extrapolated from data at other versions.