


SHADOW SENSOR FLOODLIGHT GEN3

PRODUCT DETAILS


- Lumen maintenance: L70 54,000hrs
- LED: Colour Select 3000K/4000K/5000K, CRI80, 6SDCM
- Beam angle: Symmetrical, 110°
- Driver: Integral, Lumen Select 15/30W, Fixed Output 50W, Non dimmable
- Surge protection: 4kV/6kV
- Sensor: PIR sensor, Adjustable
- Rating: IP65, IK06, Class I
- Operating temperature: -25°C to +40°C
- Housing: Slimline chromated LM6 marine grade aluminum
- Finishing: Black RAL7021, Powder coated
- Diffuser/Lens: opaque low glare glass
- Connection: 1m flex
- Accessory: Complete with corner mount bracket
- Warranty: 5 year

APPLICATIONS

Surface mounted (ceiling/wall), External
Residential, Light commercial

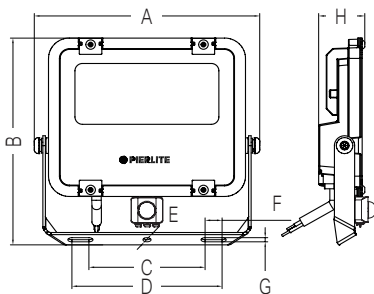

VERSION	A (MM)	B (MM)	C (MM)	D (MM)	E (MM)	F (MM)	G (MM)	H (MM)
SHAD30CSLSPG3	178	168	92	119	6.5	13.5	6.5	37
SHAD50CSPG3	223	205	144	164	6.5	10	6.5	36



SYMMETRICAL 110°

CODE	DESCRIPTION	POWER	LUMENS	EFFICACY	WEIGHT
SHAD30CSLSPG3	SHADOW FLOODLIGHT 15W/30W COLOUR SELECT 3000K/4000K/5000K GEN3 C/W PIR SENSOR	30W 15W	4050LM 2080LM	135LM/W 139LM/W	0.8KG
SHAD50CSPG3	SHADOW FLOODLIGHT 50W COLOUR SELECT 3000K/4000K/5000K GEN3 C/W PIR SENSOR	50W	6600LM	132LM/W	1.0KG

"POWER" is tested system powers from luminaire; "LUMENS" is delivered lumens from luminaire, including thermal, electrical and optic losses; ^Figures are interpolated / extrapolated from data at other versions.