



## MAXI MASTER LED G2 FLOODLIGHT

### PRODUCT DETAILS:

- Rated life: L70/B50 50000hrs
- LED: CCT 4000K, CRI>80, 7 SDCM
- Beam angle: Symmetrical, Asymmetrical
- Driver: Integral, Non-Dim
- Rating: IP65, IK08, Class I
- Operating temperature: -10°C to +40°C
- Housing: Die-cast LM6 aluminium (low copper content <0.1%)
- Finishing: Black, Powder coating
- Diffuser/Lens: Tempered glass, Clear
- Connection/Installation: 1.0m flying lead, Galvanised trunnion arm with integrated aiming protractor
- Accessory: Wire guard
- Warranty: 5 year

### APPLICATIONS:

Surface mount, Internal, External  
Carpark, Commercial, Industrial, Security lighting

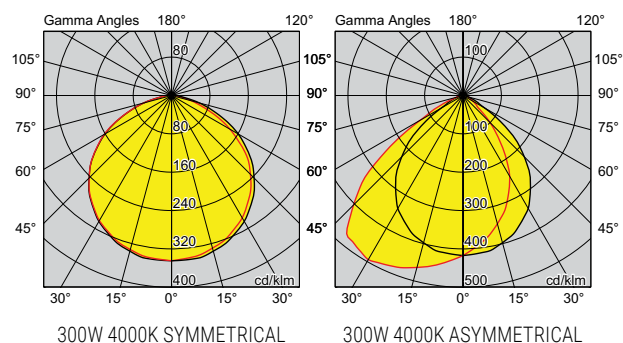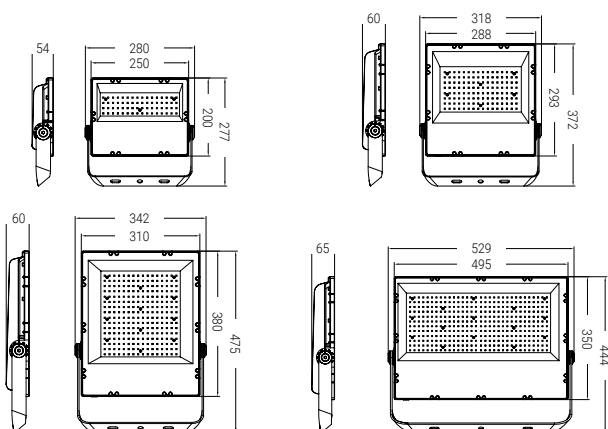

CODE	DESCRIPTION	POWER <sup>~</sup>	LUMENS <sup>+</sup>	EFFICACY	WEIGHT
MML100S	100W 4000K CRI>80 NON-DIM SYMMETRICAL	102W	12254lm	120lm/W	4.0kg
MML100A	100W 4000K CRI>80 NON-DIM ASYMMETRICAL	102W	11429lm	112lm/W	4.0kg
MML200S	200W 4000K CRI>80 NON-DIM SYMMETRICAL	201W	24051lm	120lm/W	6.2kg
MML200A	200W 4000K CRI>80 NON-DIM ASYMMETRICAL	201W	22054lm	110lm/W	6.2kg
MML300S	300W 4000K CRI>80 NON-DIM SYMMETRICAL	296W	35729lm	121lm/W	9.5kg
MML300A	300W 4000K CRI>80 NON-DIM ASYMMETRICAL	293W	34271lm	117lm/W	9.5kg
MML100WG	100W WIRE GUARD				
MML200WG	200W WIRE GUARD				
MML300WG	300W WIRE GUARD				

\*Delivered lumens from luminaire, including thermal, electrical and optic losses. <sup>~</sup>Tested system powers from luminaire.