

CANOPY LIGHT LOWBAY

PRODUCT DETAILS




Rated life: L80/B10 50000hrs
 LED: CCT 4000K, CRI80, 5 SDCM
 Beam angle: Symmetrical, 120°
 Driver: MeanWell, Integral, 1-10V dimming
 Rating: IP65, IK10, Class I
 Operating temperature: -40°C to +50°C
 Housing: ADC12 Die-cast aluminium
 Finishing: White RAL9016, Powder coating
 Diffuser/Lens: Polycarbonate, Frosted, Reeded
 Connection: 1m flying lead and dimming cable, Center cable entry
 Accessory: Surface mount bracket (order separately)
 Warranty: 5 year

MADE TO ORDER OPTIONS (LEAD TIME AND MOQ MAY APPLY)

DALI/PUSH dimming

APPLICATIONS

Surface mount (ceiling), Internal, External
 Service station canopies, Retail spaces, Manufacturing facilities, Cold storage and Refrigerated warehouses

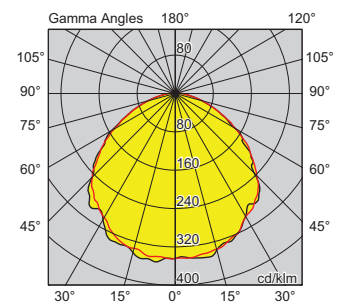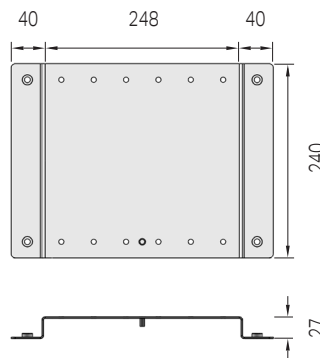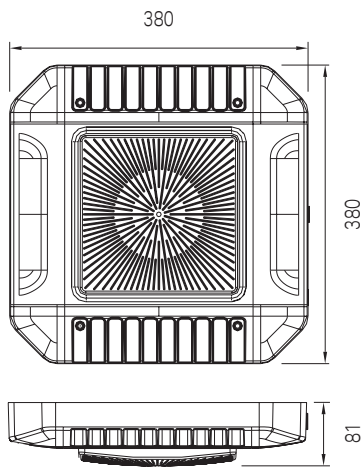

CODE	DESCRIPTION	POWER [~]	LUMENS [*]	EFFICACY	WEIGHT
PCNPY120W4K	120W 4000K CRI80 1-10V	120W	17641LM	147LM/W	5.8KG
PCNPY150W4K	150W 4000K CRI80 1-10V	146W	21169LM	145LM/W	5.8KG
PCNPYBRKT	SURFACE MOUNT BRACKET				

[~]Tested system powers from luminaire. ^{*}Delivered lumens from luminaire, including thermal, electrical and optic losses. [^]Figures are interpolated / extrapolated from data at other versions.