



CILINDRO TRACK LIGHT GEN3

PRODUCT DETAILS

Rated life: L70 B50 50000hrs
 LED: 3000K/4000K, CRI90, 3SDCM
 Beam angle: Symmetrical, 24°/36°(default)/54°
 Driver: Integral, Non-Dim, Flicker-Free design
 Rating: IP20, Class I
 Operating temperature: -20°C to +40°C
 Housing: Die-cast aluminium, Horizontal rotation 345°, Vertical tilt 90°
 Finishing: Textured Black RAL9005/White RAL9016, Powder coated
 Diffuser/Lens: Complete with 3 interchangeable lenses
 24°/36°(default)/54°, Polycarbonate (PC), Clear, Prismatic
 Connection: Global Track 3 Circuit GA69 adapter
 Warranty*: 5 year

APPLICATIONS:

Surface mounted (wall), Internal/External
 Carparks, Commercial areas, Industry areas, Security lighting

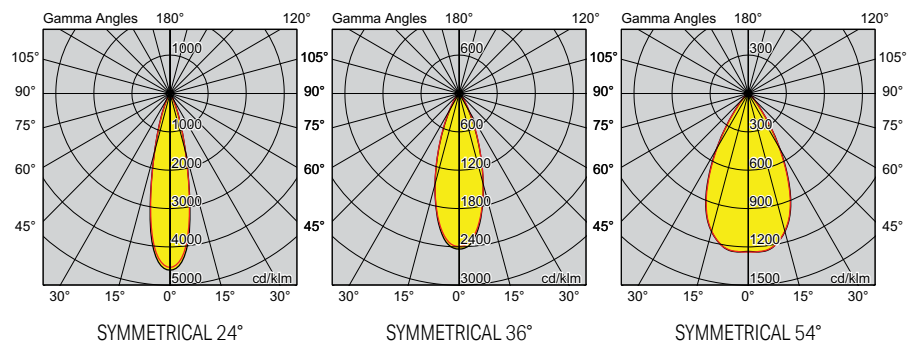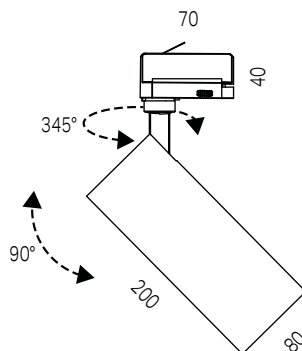

CODE	DESCRIPTION	POWER*	LUMENS*	EFFICACY	WEIGHT
CI80323WG3	CLINDRO TRACK LIGHT 32W 3000K L3 WHITE	31W	2600LM	84LM/W	0.9KG
CI80323BG3	CLINDRO TRACK LIGHT 32W 3000K L3 BLACK	31W	2600LM	84LM/W	0.9KG
CI80324WG3	CLINDRO TRACK LIGHT 32W 4000K L3 WHITE	31W	2800LM	90LM/W	0.9KG
CI80324BG3	CLINDRO TRACK LIGHT 32W 4000K L3 BLACK	31W	2800LM	90LM/W	0.9KG

*Please refer to the warranty policy at www.pierlite.co.nz; "POWER" is tested system powers from luminaire; "LUMENS" is delivered lumens from luminaire, including thermal, electrical and optic losses; *Figures are interpolated / extrapolated from data at other versions.