

LUMEN SELECT™ COLOUR SELECT

NIPPER BATTEN



PRODUCT DETAILS



Size: 2ft/600mm, 4ft/1200mm, 5ft/1500mm
 Rated life: L80 B50 54000hrs
 LED: Colour Select 4000K/5000K/6500K, CRI80, 5SDCM
 Beam angle: Symmetrical, 120°
 Driver: Integral, Non dimmable, Flicker free design
 Rating: IP20, Class I
 Operating temperature: 0°C to +40°C
 Housing: Steel
 Finishing: White RAL9016, Powder coated
 Diffuser/Lens: Polycarbonate (PC), Frosted,
 Connection: Insect proof sealed LED module with quick release clips and removable connector, Ø20mm knockout for conduit or cable glands, Center cable entry, End to end mounting
 Warranty*: 5 year

MADE TO ORDER OPTIONS (LEAD TIME AND MOQ MAY APPLY)

Dimming options, Emergency

APPLICATIONS

Surface mounted (ceiling/wall), Internal
 Commercial, Retail, Residential

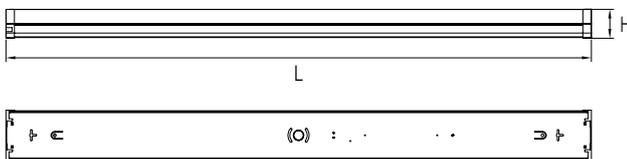

VERSION	L (MM)	W (MM)	H (MM)
2FT/600MM	630	130	74
4FT/1200MM	1230	130	74
5FT/1500MM	1500	130	74

CODE	DESCRIPTION	POWER	LUMENS	EFFICACY	WEIGHT
NIPBAT202ECS	NIPPER BATTEN 2FT 18W 4/5/65K @ 4K	18W	1900LM	106LM/W	1.2KG
NIPBAT404ECSLS	NIPPER BATTEN 4FT 20/26/31/36W 4/5/65K @ 20W 4K	20W	2400LM	120LM/W	21.KG
	NIPPER BATTEN 4FT 20/26/31/36W 4/5/65K @ 26W 4K	26W	3000LM	115LM/W	
	NIPPER BATTEN 4FT 20/26/31/36W 4/5/65K @ 31W 4K	31W	3400LM	110LM/W	
	NIPPER BATTEN 4FT 20/26/31/36W 4/5/65K @ 36W 4K	36W	4000LM	111LM/W	
NIPBAT505ECSLS	NIPPER BATTEN 5FT 29/36/44/51W 4/5/65K @ 29W 4K	29W	4000LM	138LM/W	2.6KG
	NIPPER BATTEN 5FT 29/36/44/51W 4/5/65K @ 36W 4K	36W	5000LM	139LM/W	
	NIPPER BATTEN 5FT 29/36/44/51W 4/5/65K @ 44W 4K	44W	5900LM	134LM/W	
	NIPPER BATTEN 5FT 29/36/44/51W 4/5/65K @ 51W 4K	51W	6700LM	131LM/W	

*Please refer to the warranty policy at www.pierlite.co.nz; "POWER" is tested system powers from luminaire; "LUMENS" is delivered lumens from luminaire, including thermal, electrical and optic losses; ^Figures are interpolated / extrapolated from data at other versions.