

**LUMEN SELECT™** **COLOUR SELECT**



## ORION OYSTER GEN3

### PRODUCT DETAILS



Size: Ø300mm, Ø350mm  
 Rated life: L70 B50 54000hrs  
 LED: Colour Select 3000K/4000K/6000K, CRI80, 6SDCM  
 Beam angle: Symmetrical, 110°  
 Driver: Integral, Phase dimming  
 Rating: IP54, Class I  
 Operating temperature: 0°C to +40°C  
 Housing: Removable Polycarbonate (PC) trim, Steel base  
 Finishing: White  
 Diffuser/Lens: Acrylic (PMMA), Frosted  
 Connection: Center cable entry, Large terminal block  
 Warranty\*: 5 year

### MADE TO ORDER OPTIONS (LEAD TIME AND MOQ MAY APPLY)

Sensor

### APPLICATIONS

Surface mounted (ceiling), Internal  
 Residential, Apartments, Commercial spaces

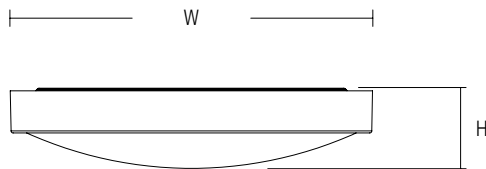

VERSION	W (MM)	H (MM)
ORN16W3/4/6KDG3	Ø300	80
ORN23W3/4/6KDG3	Ø350	80

CODE	DESCRIPTION	POWER™	LUMENS*	EFFICACY	WEIGHT
ORN16W3/4/6KDG3	ORION OYSTER 300 16W 3/4/6K PHASE DIM @ 4K WITH TRIM	16W	1400LM	88LM/W	0.57KG
	WITHOUT TRIM	16W	1800LM	113LM/W	
ORN23W3/4/6KDG3	ORION OYSTER 350 16/23W 3/4/6K PHASE DIM @ 4K WITH TRIM	16W	1400LM	88LM/W	0.75KG
	WITHOUT TRIM	16W	1700LM	106LM/W	
	WITH TRIM	23W	2000LM	87LM/W	
	WITHOUT TRIM	23W	2400LM	104LM/W	

\*Please refer to the warranty policy at [www.pierlite.co.nz](http://www.pierlite.co.nz); "POWER" is tested system powers from luminaire; "LUMENS" is delivered lumens from luminaire, including thermal, electrical and optic losses; ^Figures are interpolated / extrapolated from data at other versions.