

TABLET DIRECT & INDIRECT WALL LIGHT GEN2





PRODUCT DETAILS

Rated life: L70 B10 40000hrs
 LED: 3000K, CRI80, 5SDCM
 Beam angle: : Symmetrical, Direct & Indirect
 Driver: Integral, Non dimmable
 Rating: IP65, Class I
 Operating temperature: -10°C to +40°C
 Housing: Aluminium
 Finishing: Black, Powder coated
 Diffuser/Lens: Glass, Frosted
 Connection: Back entry, Large terminal block
 Warranty*: 5 year

APPLICATIONS

Surface mounted (wall), Internal/External
 Residential, Apartments, Hospitality

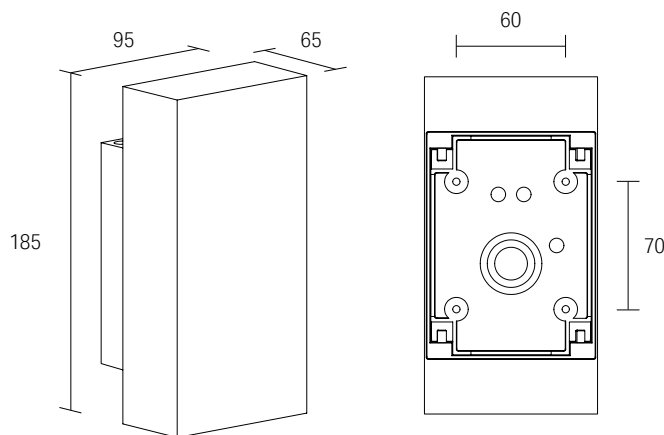

CODE	DESCRIPTION	POWER	LUMENS	EFFICACY	WEIGHT
TABLDI830B	TABLET WALL LIGHT DIRECT & INDIRECT 8W 3K BLACK	8W	650LM	81LM/W	0.90KG

*Please refer to the warranty policy at www.pierlite.co.nz; "POWER" is tested system powers from luminaire; "LUMENS" is delivered lumens from luminaire, including thermal, electrical and optic losses; ^Figures are interpolated / extrapolated from data at other versions.